

MBA-S

Aluminum-plastic composite surface film
can strongly bond to concrete or wooden substrates

Technical Data Sheet

No.	Property		Value
1	Thickness/ mm		≥1.5
2	Tensile force /(N/50mm)	Longitudinal	≥300
		Transverse	
	Elongation at break/ %	Longitudinal	≥50
		Transverse	
3	Tear Force(N)		≥20
			≥20
4	Peel Strength between Membranes(N/mm)		≥1.0
	Heat treatment		≥0.8
5	Dimensional Change Rate/ %		≤±1.0
6	Peel Strength (bond to cement mortar) /(N/mm)		≥1.5
	Heat treatment		≥1.0
7	Heat Aging (80°C,168h)		Tensile retention/%
			≥90
			Elongation retention/%
			≥80
		Low Temperature Flexibility	No crack at -18°C
8	Bonding Retention /min		≥30
9	Heat Resistance		70°C, 2h, no blister or flow
10	Low Temperature Flexibility		No crack at -20°C (-4°F)
11	Water Impermeability		No water leakage in 2 hours(0.3Mpa, 120min)

REMARK:All the test items according to China Standard GB/T 35467-2017.

Storage & Transportation:

- Store materials in dry and ventilated condition, protect from sunshine, rain or other extreme environment.
- Different types and sizes of materials shall be stored separately, keep in sequence and avoid mess.
- Prevent squeezing against membranes during transit; provide cover on top if necessary.
- Storage temperature shall be less than 45°C; the max height of stack is 5 layers.




The seller: Jiangsu Canlon Building Materials Co., Ltd
Address: No.8, Hengtong Rd, Qidu Town, Wujiang Dist,
Suzhou City Jiangsu Province, 215234, China
Tel: +86-512-63102888
FAX: +86-512-63807088
Web: www.canlon.com



General Description:

Composed of aluminum-plastic composite surface film(UV resistant), innovative special rubberized asphalt and backed release paper, MBA-S Post-applied Waterproofing Membrane is a superb membrane designed to deliver premium in-place performance for different application environment. During application, the release paper is easily removed, allowing the rubberized asphalt to bond tightly to the substrates of various materials. To install the membrane by full adhering method, the composite film can reduce surface temperature to prevent membrane from shrink, wrinkle and bulge caused by sun exposure.

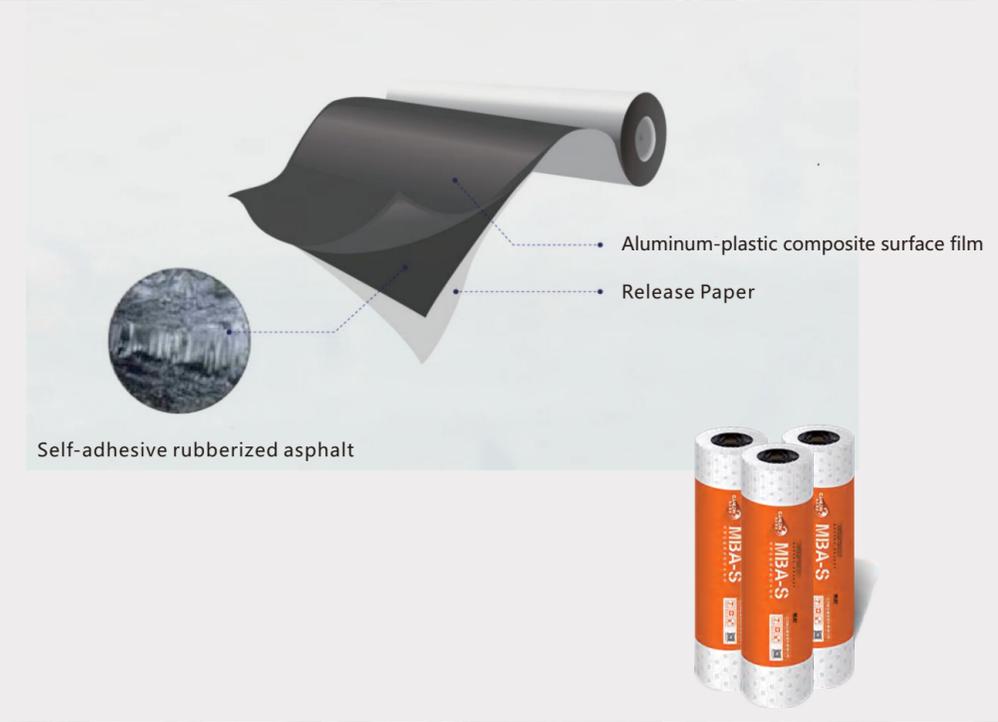

Application:

Applicable to waterproofing to the basements and concrete or wooden roof decks of industrial and residential buildings, also suited for waterproofing and damproofing to other architectural parts that entail materials high tensile or tearing strength and elongation.

Available Size:

Total thickness (mm)	Width (m)	Length (m)	Remark
1.5	1m	20.0	Other specification can be offered upon requirements
2.0	1m	20.0	

Advantages:

- 1.Superior physical properties:** high tensile strength, flexible seal around nails and cracks, compatible with different substrates.
- 2.Cold-applied:** no flame hazard, self-adhered asphalt result in firm bonding and continuous overlapping
- 3.High performance aluminum-plastic composite surface film:** this can reduce surface temperature to prevent membrane from shrink, wrinkle and bulge caused by UV exposure.
- 4.Flexible and ease of use in detailed areas, together with other waterproofing.**
- 5.Convenience of repairing membranes:** water will not migrate even any leakage occurs due to firm bonding to substrate, so fast detecting of damaged membrane and immediate repairing.



Installation:

Post-applied:

1.Substrate preparation

Remove all dust, contaminants or other foreign dirt. Keep the substrate to be dry.

2.Priming

Apply primer to substrate. During application, ensure the application is performed towards one direction and obtain even thickness, avoid leakage or accumulation and expose the primer until it is not sticky to fingers.

3.Details Treatment

Reinforce detailed areas such as inside or outside corners, drainages, expansion joints and penetration pipes.

4.Positioning

Align the membranes within right area where the membranes will be installed.

5.Membranes installation

Carefully peel down of the release film at the back, at the same time slowly push the membranes to move forward within reserved area. During the installation, the membranes shall move forward at proper speed.

The release film attached to side laps must be kept clean and free from contamination before overlapping to protect the adhesive side from being contaminated or damaged.

- Pull-off of membranes with excessive force is prohibited.

6.Trapped air excluding

In order to obtain firm bonding to substrate, immediately press or roll (back and forth) tightly over the installed membranes to exclude trapped air.

7.Cut edges and end laps overlapping

When overlapping cut edges, remove release film attached to side laps of previous and succeeding membranes, then bond the two adjacent membranes together (along the controlled liner/selvage). Immediately use roller to press tightly over the overlapping areas so that the trapped air is fully excluded. On end laps overlapping, the operation process follows cut edges.

- The recommended overlapping width is 80mm for below grade application, and 60mm for roofing projects.

